



We touch
your **electricity**
everyday!



CE RoHS
Compliant



Industrial Plugs & Sockets



C&S Electric Ltd. is a leading manufacturer of electrical and electronic equipment in India. It is one of India's largest exporters of industrial switchgear & power busbar products. C&S Electric products are used in applications ranging from power generation, transmission and distribution, protection and final consumption.

C&S Electric has the following product verticals:

- LV Switchgear
- LV Switchboards
- Power Busbars
- Protection and Measurement Devices

MANUFACTURING FACILITIES



MARKET LEADER

C&S is one of the leading supplier in the LV Switchgear business segment and a market leader in the busbar business with more than 50% share in Indian market.

11 MANUFACTURING PLANTS

C&S Electric have 11 state-of-the-art manufacturing facilities in Noida, Haridwar & Guwahati, which are equipped with latest tools and systems to ensure highest level of quality and services.

600+ STOCKISTS

A dedicated network of channel partners, ensuring access to the farthest corners of India, with an obsession for customer services. In addition C&S products are available in 8000+ retail counters nationally.

EXPORTS TO OVER 85 COUNTRIES

C&S exports the entire range of products across all 7 continents, thus reaffirming its position as one of India's largest exporters of industrial electrical products.

5000+ WORKFORCE

5000+ Workforce including over 371 engineers, dedicated sales team of 424 people & millions of satisfied customers.

R&D

4 Govt. approved labs/centres, over 20,000 sqft. space dedicated to R&D, 70 R&D engineers, state of the art testing & design facilities ... & most of the all a passion for innovation & excellence.

CONTENTS

Features & Benefits	05
Plugs	07~09
Sockets	10~15
Connectors	16~17
Interlock Switch Socket	18~20
AC Distribution Box	21~ 22
Application Matrix	23

Quality Assurance



BENEFITS


- Safety through interchangeability
- High grade thermo plastic material assures:
 - Exceptional high impact resistance
 - High thermal stability
 - High insulated Quality
 - Good resistance to various chemicals
- Colour codes for easy identification of Plug & Sockets
- Locking device prevent unintended withdrawal

The Plugs & Sockets ranges are:


- 3 Pin 16, 32 & 63A, 240V AC IP 44 & 67 versions
- 5 Pin 16, 32 & 63A, 415V AC IP 44 & 67 versions
- 3, 5 Pin 16 & 32A, 240/415V AC Interlocked Sockets IP 44 & 67 versions
- AC Distribution Box with Socket 16, 32 & 63A IP 40

IEC 60309 Series IP44 & IP67 Protection


Position of the Earthing Contact

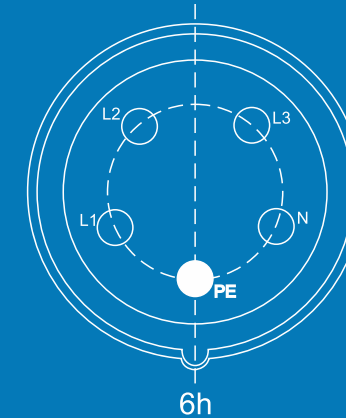

Position of the Earthing Contact

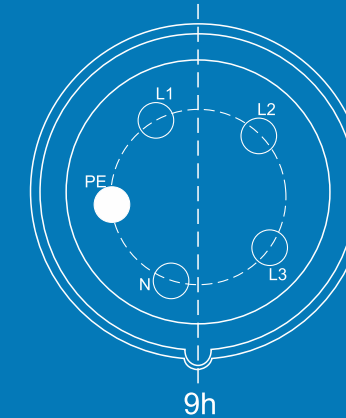

IEC 60309 Clock

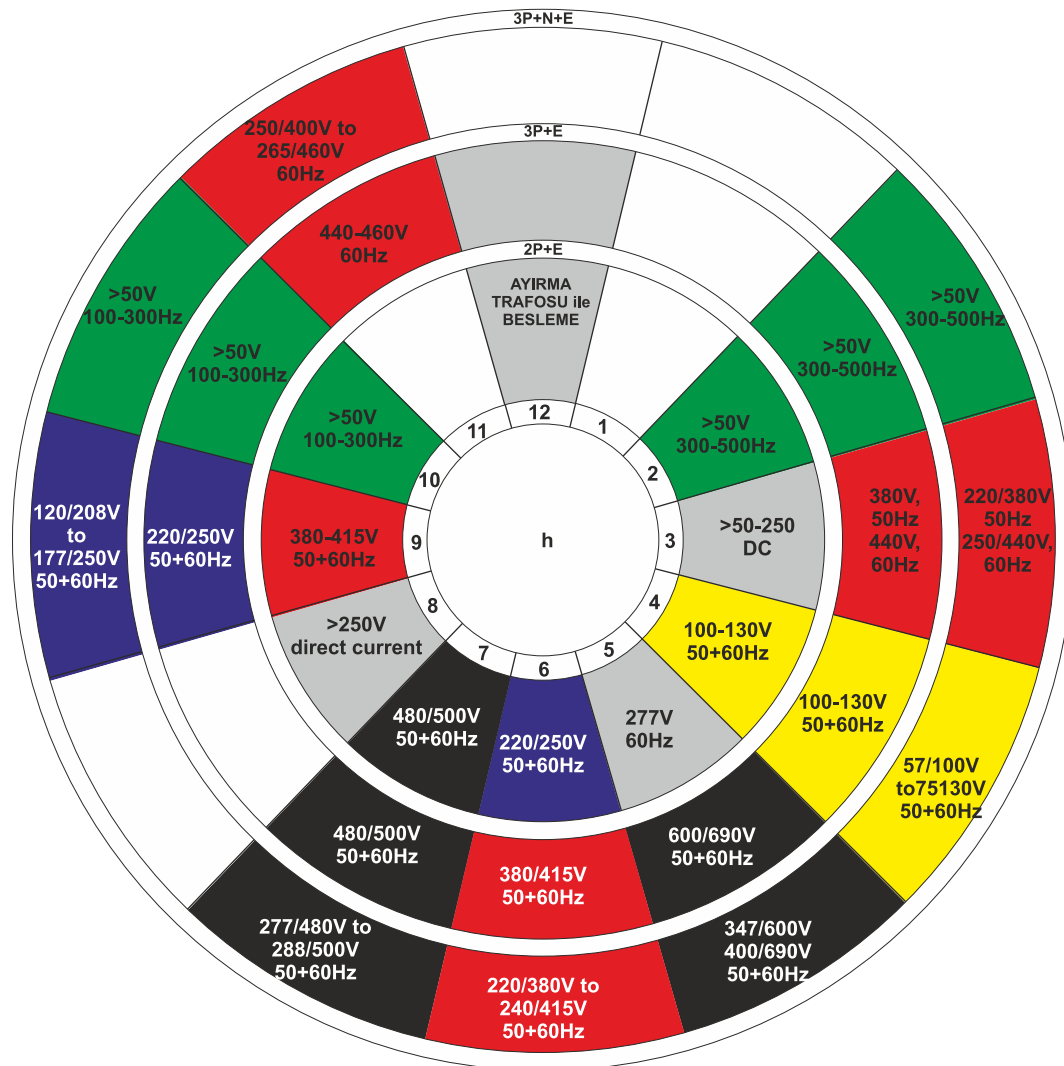


Rated Operating Voltage	Colour Code
20-25 V	violet
45-50 V	white
100-130 V	yellow
200-250 V	blue
380-480 V	red
500-690 V	black
>60-500 Hz	green
no colour code	grey

Plugs

CS60004



Rating: 16A, 2P+E, 6h
Voltage: 220-250V
IP Category: IP44
Plugs Straight - Splash Proof

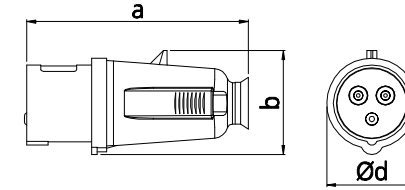


Earth contact position	6h
Pole	2P+E
Dimension (mm)	a 125 b 59 d 50
Cable cross section (mm ²)	1-2.5

CS60026



Rating: 16A, 2P+E, 6h
Voltage: 220-250V
IP Category: IP67
Plugs Straight - Water Tight

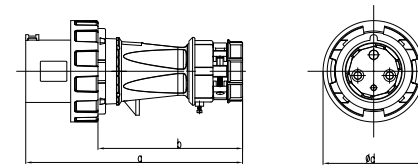


Earth contact position	6h
Pole	2P+E
Dimension (mm)	a 130.5 b 84 c 72.3
Cable cross section (mm ²)	1.5-4

CS60015



Rating: 32A, 2P+E, 6h
Voltage: 220-250V
IP Category: IP44
Plugs Straight - Splash Proof

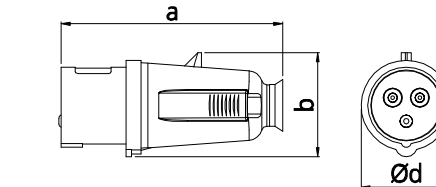


Earth contact position	6h
Pole	2P+E
Dimension (mm)	a 155 b 79 d 64
Cable cross section (mm ²)	2.5-6

CS60037



Rating: 32A, 2P+E, 6h
Voltage: 220-250V
IP Category: IP67
Plugs Straight - Water Tight

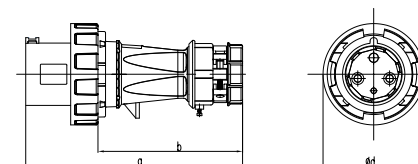

Earth contact position	6h
Pole	2P+E
Dimension (mm)	a 157.5 b 104 c 93
Cable cross section (mm ²)	2.5-10

Plugs

Earth contact position	6h
Pole	2P+E
Dimension (mm)	a 238.3 b 155.3 c 112.2
Cable cross section (mm ²)	6.0-25

Earth contact position	6h
Pole	3P+N+E
Dimension (mm)	a 140.5 b 104 c 75.8 d 68
Cable cross section (mm ²)	1.5-4

Earth contact position	6h
Pole	3P+N+E
Dimension (mm)	a 140.5 b 94 c 87
Cable cross section (mm ²)	1.5-4

Earth contact position	6h
Pole	3P+N+E
Dimension (mm)	a 167.5 b 122 c 89 d 77.8
Cable cross section (mm ²)	2.5-10

Plugs

Rating: 32A, 3P+N+E,6h
Voltage: 380-415V
IP Category: IP67
Plugs Straight - Water Tight

Technical drawing of the CS60042 plug showing side and front views with dimensions a, b, c, and 64mm.

Earth contact position	6h
Pole	3P+N+E
Dimension (mm)	a 167.5 b 114 c 100
Cable cross section (mm ²)	2.5-10

Rating: 63A, 3P+N+E,6h
Voltage: 380-415V
IP Category: IP67
Plugs Straight - Water Tight

Technical drawing of the CS61053 plug showing side and front views with dimensions a, b, c, and 64mm.

Earth contact position	6h
Pole	3P+N+E
Dimension (mm)	a 238.3 b 155.3 c 112.2
Cable cross section (mm ²)	6.0-25

Rating: 125A, 3P+N+E,6h
Voltage: 380-415V
IP Category: IP67
Plugs Straight - Water Tight

Technical drawing of the CS60061 plug showing side and front views with dimensions a, b, c, and 64mm.

Earth contact position	6h
Pole	3P+N+E
Dimension (mm)	a 291.1 b 210 c 131
Cable cross section (mm ²)	25-70

Rating: 32A, 3P+E,3h
Voltage: 380-415V
IP Category: IP67
Plugs Straight - Water Tight

Technical drawing of the CS60145 plug showing side and front views with dimensions a, b, c, and 64mm.

Earth contact position	3h
Pole	3P+E
Dimension (mm)	a 186 b 133 c 94
Cable cross section (mm ²)	2.5-10

Sockets

3 Pin, 5 Pin - IP44 & 67




Sockets

CS62205



Rating: 16A, 2P+E, 6h
Voltage: 220-250V
IP Category: IP44
Panel Mounting Angles Socket- splash proof




Earth contact position	6h
Pole	2P+E
Dimension (mm)	a 74,5 b 85 c 60,5 d 61 e 51 f 32 g 55 h 37,5 i 23,5 r 7 j 4,3
Cable cross section (mm²)	1-2,5

CS62227



Rating: 16A, 2P+E, 6h
Voltage: 220-250V
IP Category: IP67
Panel Mounting Angles Socket - Water Tight




Earth contact position	6h
Pole	2P+E
Dimension (mm)	a 73,5 b 64 c 52 d 60 e 52 f 5,3 g 7 g.1 2 h 84 i 78 k 45 l 52 l1 60
Cable cross section (mm²)	1,5-4

CS62216



Rating: 32A, 2P+E, 6h
Voltage: 220-250V
IP Category: IP67
Panel Mounting Angles Socket- splash proof




Earth contact position	6h
Pole	2P+E
Dimension (mm)	a 80,5 b 97 c 60 d 71 e 67 f 37 g 70 h 35,5 i 35,5 r 8 j 5,3
Cable cross section (mm²)	2,5-6

CS62238








Rating: 32A, 2P+E, 6h
Voltage: 220-250V
IP Category: IP67
Panel Mounting Angles Socket - Water Tight








Earth contact position	6h
Pole	2P+E
Dimension (mm)	a 100 b 92 c 64 d 85 e 77 f 5,3 g 8 g.1 2 h 109 i 103 k 54 l 70 l1 82
Cable cross section (mm²)	2,5-10

Sockets

CS63249	Rating: 63A, 2P+E, 6h Voltage: 220-250V IP Category: IP67 Panel Mounting Angles Socket - Water Tight	Earth contact position	6h
		Pole	2P+E
		Dimension (mm)	a 110 b 106 c 85 d 85 e 77 f 6,2 g 12 g.1 2 h 125 i 117 k 69 l 90 l1 103
		Cable cross section (mm ²)	6.0-25
CS62404	Rating: 16A, 2P+E, 6h Voltage: 220-250V IP Category: IP44 Surface Mounting Socket - Splash Proof	Earth contact position	6h
		Pole	2P+E
		Dimension (mm)	a 95 b 102 c 123 d 64,2 e 77,5 e1 88 f 5,5 g 5 h 131 M 25
		Cable cross section (mm ²)	1.5-4
CS62426	Rating: 16A, 2P+E, 6h Voltage: 220-250V IP Category: IP67 Surface Mounting Socket - Water Tight	Earth contact position	6h
		Pole	2P+E
		Dimension (mm)	a 95 b 102 c 115 d 64,2 e 77,5 e1 88 f 5,5 g 5 h 133 M 25
		Cable cross section (mm ²)	1.5-4
CS62415	Rating: 32A, 2P+E, 6h Voltage: 220-250V IP Category: IP44 Surface Mounting Socket - Splash Proof	Earth contact position	6h
		Pole	2P+E
		Dimension (mm)	a 121 b 112 c 142 d 91 e 79 e1 98,5 f 5,5 g 5 h 160 M 32
		Cable cross section (mm ²)	2.5-10
CS62437	Rating: 32A, 2P+E, 6h Voltage: 220-250V IP Category: IP67 Surface Mounting Socket - Water Tight	Earth contact position	6h
		Pole	2P+E
		Dimension (mm)	a 121 b 112 c 146 d 90,2 e 79 e1 98,5 f 5,5 g 5 h 160 M 32
		Cable cross section (mm ²)	2.5-10

Sockets


CS63448	Rating: 63A, 2P+E, 6h Voltage: 220-250V IP Category: IP67 Surface Mounting Socket - Water Tight	Earth contact position	6h
		Pole	2P+E
		Dimension (mm)	a 170 b 118,5 c 171 d 135,6 e 103 e1 103 f 6,1 g 6 h 216 M 40
		Cable cross section (mm ²)	6.0-25
CS62210	Rating: 16A, 3P+N+E, 6h Voltage: 380-415V IP Category: IP44 Panel Mounting Angles Socket- splash proof	Earth contact position	6h
		Pole	3P+N+E
		Dimension (mm)	a 100 b 92 c 58 d 85 e 77 f 5,3 g 8 g.1 2 h 105 i 41 k 65 L1 75
		Cable cross section (mm ²)	1.5-4
CS62232	Rating: 16A, 3P+N+E, 6h Voltage: 380-415V IP Category: IP67 Panel Mounting Angles Socket - Water Tight	Earth contact position	6h
		Pole	3P+N+E
		Dimension (mm)	a 100 b 92 c 62 d 85 e 77 f 5,3 g 8 g.1 2 h 105 i 96 k 44 l 65 l1 75
		Cable cross section (mm ²)	1.5-4
CS62283	Rating: 32A, 3P+E, 3h Voltage: 380-415V IP Category: IP67 Panel Mounting Angles Socket - Water Tight	Earth contact position	3h
		Pole	3P+E
		Dimension (mm)	a 100 b 92 c 64 d 85 e 77 f 5,3 g 8 g.1 2 h 109 i 103 k 54 l 70 l1 82
		Cable cross section (mm ²)	2.5-10
CS62221	Rating: 32A, 3P+N+E, 6h Voltage: 380-415V IP Category: IP44 Panel Mounting Angles Socket- splash proof	Earth contact position	6h
		Pole	3P+N+E
		Dimension (mm)	a 100 b 92 c 62 d 85 e 77 f 5,3 g 8 g.1 2 h 112 i 55 k 73 L1 86
		Cable cross section (mm ²)	2.5-10

Sockets

CS62243



Rating 32A, 3P+N+E, 6h
Voltage: 380-415V
IP Category: IP67
Panel Mounting Angles Socket - Water Tight




Earth contact position		6h
Pole		3P+N+E
Dimension (mm)	a	100
	b	92
	c	66
	d	85
	e	77
	f	5.3
	g	8
	h	2
	i	113
	j	110
	k	54
	l	73
	M	86
Cable cross section (mm ²)		2.5-10

CS63254



Rating: 63A, 3P+N+E, 6h
Voltage: 380-415V
IP Category: IP67
Panel Mounting Angles Socket - Water Tight




Earth contact position		6h
Pole		3P+N+E
Dimension (mm)	a	110
	b	106
	c	85
	d	85
	e	77
	f	6.2
	g	12
	h	2
	i	125
	j	117
	k	69
	l	90
	M	103
Cable cross section (mm ²)		6.0-25

CS62262



Rating: 125A, 3P+N+E, 6h
Voltage: 380-415V
IP Category: IP67
Panel Mounting Angles Socket - Water Tight




Earth contact position		6h
Pole		3P+N+E
Dimension (mm)	a	114
	b	110
	c	85
	d	90
	e	90
	f	6.2
	g	13
	h	2
	i	135
	j	135
	k	103
	l	91.5
	M	105
Cable cross section (mm ²)		25-70

CS62409



Rating: 16A, 3P+N+E, 6h
Voltage: 380-415V
IP Category: IP44
Surface Mounting Socket - Splash Proof




Earth contact position		6h
Pole		3P+N+E
Dimension (mm)	a	95
	b	102
	c	134
	d	64.2
	e	77.5
	f	88
	g	5.5
	h	5
	i	130
	j	25
	k	25
	l	25
	M	25
Cable cross section (mm ²)		1.5-4

Sockets

CS62431



Rating: 16A, 3P+N+E, 6h
Voltage: 380-415V
IP Category: IP67
Surface Mounting Socket - Water Tight

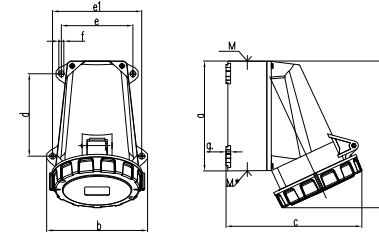


Earth contact position		6h
Pole		3P+N+E
Dimension (mm)	a	95
	b	102
	c	127
	d	64.2
	e	77.5
	f	88
	g	5.5
	h	5
	i	134
	j	25
	k	25
	l	25
	M	25
Cable cross section (mm ²)		1.5-4

CS62420



Rating: 32A, 3P+N+E, 6h
Voltage: 380-415V
IP Category: IP44
Surface Mounting Socket - Splash Proof

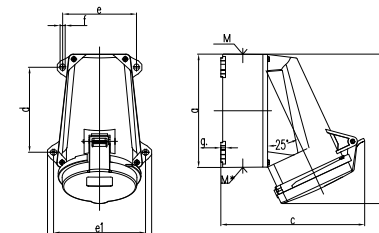


Earth contact position		6h
Pole		3P+N+E
Dimension (mm)	a	121
	b	112
	c	155
	d	90.2
	e	79
	f	98.5
	g	5.5
	h	5
	i	160
	j	32
	k	32
	l	32
	M	32
Cable cross section (mm ²)		2.5-10

CS62442



Rating: 32A, 3P+N+E, 6h
Voltage: 380-415V
IP Category: IP67
Surface Mounting Socket - Water Tight

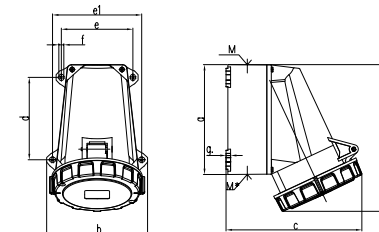


Earth contact position		6h
Pole		3P+N+E
Dimension (mm)	a	121
	b	112
	c	150
	d	90.2
	e	79
	f	98.5
	g	5.5
	h	5
	i	162
	j	32
	k	32
	l	32
	M	32
Cable cross section (mm ²)		2.5-10

CS63453



Rating: 63A, 3P+N+E, 6h
Voltage: 380-415V
IP Category: IP67
Surface Mounting Socket - Water Tight

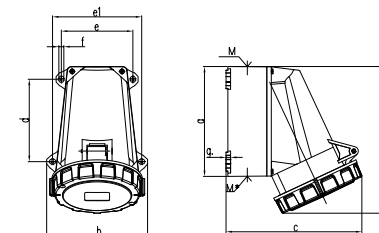

Earth contact position		6h
Pole		3P+N+E
Dimension (mm)	a	170
	b	118.5
	c	171
	d	135.6
	e	103
	f	6.1
	g	6
	h	216
	i	40
	j	40
	k	40
	l	40
	M	40
Cable cross section (mm ²)		6.0-25

Connectors

3 Pin, 5 Pin - IP44 & 67




Connectors

CS62004



Rating: 16A, 2P+E, 6h
Voltage: 220-250V
IP Category: IP44
Connector - Splash Proof

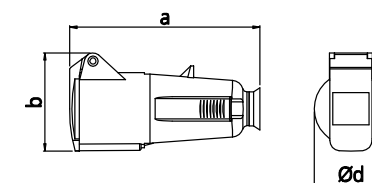

Earth contact position **6h**

Pole **2P+E**


Dimension (mm) a 131
b 69
d 50.5

Cable cross section (mm²) 1-2.5

CS62015



Rating: 32A, 2P+E, 6h
Voltage: 220-250V
IP Category: IP44
Connector - Splash Proof

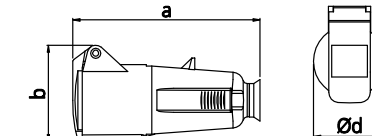

Earth contact position **6h**

Pole **2P+E**


Dimension (mm) a 165
b 87
d 65

Cable cross section (mm²) 2.5-6

CS66215



Rating: 16A, 3P+N+E, 6h
Voltage: 380-415V
IP Category: IP44
Connector - Splash Proof

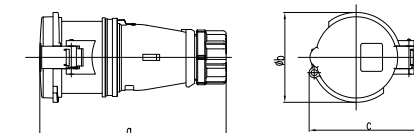

Earth contact position **6h**

Pole **3P+N+E**


Dimension (mm) a 149.5
b 75.5
c 96.5

Cable cross section (mm²) 1-2.5

CS66225



Rating: 32A, 3P+N+E, 6h
Voltage: 380-415V
IP Category: IP44
Connector - Splash Proof



Earth contact position **6h**

Pole **3P+N+E**


Dimension (mm) a 183.5
b 88.5
c 109.5

Cable cross section (mm²) 2.5-6

CS62128



Rating: 32A, 3P+N+E, 3h
Voltage: 380-415V
IP Category: IP67
Connector - Water Tight



Earth contact position **3h**

Pole **3P+E**

Dimension (mm) a 212
b 96
c 103

Cable cross section (mm²) 2.5-10

Interlock Switch Socket

3, 5 Pin 16 & 32A, IP 44 & 67




Interlock Switch Socket

CS66004(H)



Rating: 16A, 2P+E, 6h
Voltage: 220-250V
IP Category: IP44
Interlock Horizontal Switch Sockets
- Splash Proof




Earth contact position	6h
Pole	2P+E
Dimension (mm)	a 226 b 119 c 141 d 208 e 101 f 6.3 g 8 h 250 M 1x32 M* 1x25
Cable cross section (mm ²)	1.5-4

CS66200



Rating 16A, 2P+E, 6h
Voltage: 220-250V
IP Category: IP67
Interlock Horizontal Switch Sockets
- Water Tight




Earth contact position	6h
Pole	2P+E
Dimension (mm)	a 226 b 119 c 144 d 208 e 101 f 6.3 g 8 h 252 M 1x32 M* 1x25
Cable cross section (mm ²)	1.5-4

CS66015(H)



Rating: 32A, 2P+E, 6h
Voltage: 220-250V
IP Category: IP44
Interlock Horizontal Switch Sockets
- Splash Proof




Earth contact position	6h
Pole	2P+E
Dimension (mm)	a 226 b 119 c 146 d 208 e 101 f 6.3 g 8 h 264 M 1x23 M* 1x25
Cable cross section (mm ²)	2.5-10

CS66201



Rating: 32A, 2P+E, 6h
Voltage: 220-250V
IP Category: IP67
Interlock Horizontal Switch Sockets
- Water Tight




Earth contact position	6h
Pole	2P+E
Dimension (mm)	a 226 b 119 c 152 d 208 e 101 f 6.3 g 8 h 268 M 1x32 M* 1x25
Cable cross section (mm ²)	2.5-10

Interlock Switch Socket

CS66109(H)



Rating: 16A, 3P+N+E,6h
Voltage: 380-415V
IP Category: IP44
Interlock Horizontal Switch Sockets
-Splash Proof




Earth contact position	6h
Pole	3P+N+E
Dimension (mm)	a 226 b 119 c 141 d 208 e 101 f 6.3 g 8 h 254 M 1x32, 1x125 M* 2x25
Cable cross section (mm ²)	1.5-4

CS66202



Rating: 16A, 3P+N+E,6h
Voltage: 380-415V
IP Category: IP67
Interlock Horizontal Switch Sockets
- Water Tight




Earth contact position	6h
Pole	3P+N+E
Dimension (mm)	a 226 b 119 c 147 d 208 e 101 f 6.3 g 8 h 259 M 1x32, 1x125 M* 2x25
Cable cross section (mm ²)	1.5-4

CS66020(H)



Rating: 32A, 3P+N+E,6h
Voltage: 380-415V
IP Category: IP44
Interlock Horizontal Switch Sockets
- Water Tight




Earth contact position	6h
Pole	3P+N+E
Dimension (mm)	a 226 b 119 c 146 d 208 e 101 f 6.3 g 8 h 264 M 1x32, 1x125 M* 2x25
Cable cross section (mm ²)	2.5-10

CS66203



Rating: 32A, 3P+N+E,6h
Voltage: 380-415V
IP Category: IP67
Interlock Horizontal Switch Sockets
- Water Tight







Earth contact position	6h
Pole	3P+N+E
Dimension (mm)	a 226 b 119 c 153 d 208 e 101 f 6.3 g 8 h 274 M 1x32, 1x125 M* 2x25
Cable cross section (mm ²)	2.5-10

AC Distribution Box with Socket

16, 32 & 63A IP 40

Distribution Box with Socket

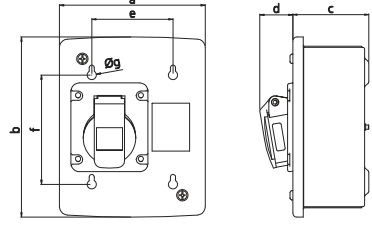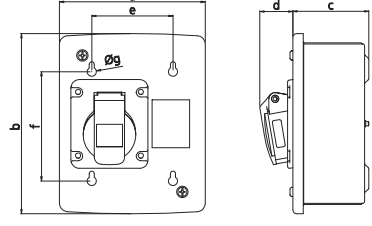CS60045		Rating: 16A, 2P+E, 6h Voltage: 220-250V IP Category: IP40 Distribution Box with Socket	Earth contact position		6h
			Pole		2P+E
			Dimension (mm)	a	140
				b	173
				c	73
				d	32
				e	78
				f	105
				g	8.8
CS60046		Rating: 32A, 2P+E, 6h Voltage: 220-250V IP Category: IP40 Distribution Box with Socket	Earth contact position		6h
			Pole		2P+E
			Dimension (mm)	a	140
				b	173
				c	73
				d	40,5
				e	78
				f	105
				g	8.8
CS60047		Rating: 32A, 3P+N+E,6h Voltage: 380-415V IP Category: IP40 Distribution Box with Socket	Earth contact position		6h
			Pole		3P+N+E
			Dimension (mm)	a	226
				b	178
				c	94
				d	45
				e	164
				f	110
				g	8.8
CS60048		Rating: 63A, 3P+N+E,6h Voltage: 380-415V IP Category: IP40 Distribution Box with Socket	Earth contact position		6h
			Pole		3P+N+E
			Dimension (mm)	a	226
				b	178
				c	94
				d	77.5
				e	164
				f	110
				g	8.8

Sector	Environment	Typical System	Socket nominal currents (A)	Recommended installation
Commercial	Data Processing Centres	Connection of "big" processors with 1n > 3.5 mA	16	Flush-mounting IP 44
	Public entertainment premises	Stage light connection	16 - 32	
Industrial	Maintenance departments	Movable and portable user connection	16 - 32	Surface-mounting IP 67 on Q-DIN IP 55
	Production departments	Machine tool and process machine connection	63 - 125	Surface-mounting IP 67
	Chemical industry			
Building	Construction and demolition sites	Distribution boards	16 - 32 - 63	On Q-BOX ASC
		Socket-outlet boards	16 - 32	On Q-DIN ASC
Agriculture	Greenhouses	Movable sprayers and pumps	16	Surface-mounting IP 67 on Q-DIN IP 55
	Sheds	Movable and portable user connection	16 - 32 - 63	
Tourism	Campsites	Power outlet in service are	16 - 32	On terminal 68 Q-MC Range
	Tourist harbours		16 - 125	
Domestic	Indoor	Air Conditioner Refrigeration	16 - 32	On terminal 68 Q DIN & Metal enclosures
	Outdoor	Generator, Lawnmower Garden Lighting		

Terminal Clamping Capacity

Socket or Plug nominal current	Flexible Cables		Solid or Twisted Cables		Possibility of clamping several wire in the same terminal
	Minimum	Maximum	Minimum	Maximum	
16A	1	2.5	1.5	4	Up to 2 flexible cables with total section not exceeding the clamping capacity
32A	2.5	6	2.5	10	
63A	6	16	6	25	
125A	16	50	25	70	



Marketing offices spread all over India

CENTRAL MARKETING OFFICE

C-60, Wing-A, Phase-II, Noida, District Gautam Budh Nagar, Uttar Pradesh-201 305 (INDIA)

Tel.: +91 120 387 4800 / 01 | Email : cmo@cselectric.co.in

CUSTOMER CARE

Toll Free Number: 1800 572 2012

E-mail: customercare@cselectric.co.in

NORTHERN REGION

DELHI

Email: cmo@cselectric.co.in

LUDHIANA

Email: ludhiana@cselectric.co.in

LUCKNOW

Email: lucknow@cselectric.co.in

KANPUR

Email: lucknow@cselectric.co.in

JAIPUR

Email: jaipur@cselectric.co.in

CENTRAL REGION

INDORE

Email: indore@cselectric.co.in

RAIPUR

Email: raipur@cselectric.co.in

NAGPUR

Email: nagpur@cselectric.co.in

EASTERN REGION

KOLKATA

Email: kolkata@cselectric.co.in

GUWAHATI

Email: guwahati@cselectric.co.in

RANCHI

Email: ranchi@cselectric.co.in

BHUBANESWAR

Email: bhubaneshwar@cselectric.co.in

WESTERN REGION

MUMBAI

Email: mumbai@cselectric.co.in

PUNE

Email: pune@cselectric.co.in

AHMEDABAD

Email: ahmedabad@cselectric.co.in

RAJKOT

Email: ahmedabad@cselectric.co.in

BARODA

Email: baroda@cselectric.co.in

SURAT

Email: surat@cselectric.co.in

SOUTHERN REGION

CHENNAI

Email: chennai@cselectric.co.in

COIMBATORE

Email: coimbatore@cselectric.co.in

KOCHI

Email: cochin@cselectric.co.in

MADURAI

Email: commercial.madurai@cselectric.co.in

BENGALURU

Email: bangalore@cselectric.co.in

HYDERABAD

Email: hyderabad@cselectric.co.in

VIJAYAWADA

Email: vijayawada@cselectric.co.in

RESIDENT ENGINEERS

AHMEDABAD: Visnagar **BANGALORE:** Bellary, Hassan, Hubli, Mangalore **BARODA:** Anand, Vapi **BHUBANESWAR:** Behrampur, Cuttack, Rourkela, Sambalpur **CHENNAI:** Vellore, Trichy **KOCHI:** Kollam **COIMBATORE:** Erode **DELHI & HARYANA:** Gurugram, Hissar, Panipat, **UP (W) & UK:** Agra, Bareilly, Dehradun, Ghaziabad, Meerut, Moradabad, Noida **GUWAHATI:** Silchar, Tezpur **HYDERABAD:** Karimnagar, Warangal **INDORE:** Bhopal, Gwalior, Jabalpur, Rewa, Ujjain **J&K:** Kashmir, Srinagar **JAIPUR:** Bhillwara, Bikaner, Jodhpur, Kota, Sikar, Udaipur **KOLKATA:** Bankura, Bardhaman, Siliguri **LUCKNOW:** Gorakhpur, Prayagraj, Shahjhanpur, Varanasi **LUDHIANA:** Amritsar, Barnala, Jammu, Mansa **MADURAI:** Nagercoil, Rajapalayam **MUMBAI:** Aurangabad, Nasik **NAGPUR:** Akola, Amravati, Chandrapur **PUNE:** Goa, Nasik, Kolhapur, Sangali, Solapur **RAIPUR:** Ambikapur **RAJKOT:** Bhavnagar, Jamnagar **RANCHI:** Dhanbad, Muzaffarpur, Patna, Purnia, Siwan **SURAT:** Aurangabad, Nasik **VIJAYAWADA:** Chittoor, Rajahmundry, Tirupathi, Vishakhapatnam

WAREHOUSES

National Warehouse

NOIDA

B-58, Sector-80, Phase-II, Noida, District Gautam Budh Nagar, Uttar Pradesh - 201305 INDIA
Ph.: +91 120 3857483/84/88/89

Regional Warehouses

INDORE

Liberty Agencies 53, Udyog Nagar, Near Musakhedi Square, Ring Road, Indore - 452001 INDIA
Ph.: +91 88780 62000 / 64000

RANCHI

Plot No. 145/C, Mandir Marg-D, Road No. 4, Ashok Nagar, Distt. Ranchi, Jharkhand - 834002 INDIA
Ph.: +91 651 2242202, 2242224

AHMEDABAD

B-25-B/C Maldi Industrial Estate, Opp. West Coast Pharmaceutical, Nr. Gota Over Bridge, Gota, Ahmedabad - 382481 INDIA
Mob.: +91 7698996868 / 6351725096,

BENGALURU

No. 25, Pattanagere Village, Kengeri Hobli, Rajarajeshwari Nagar, Bangalore - 560098 INDIA
Ph.: +91 80 29700265

