

We touch your **electricity** everyday!

CSFPI-V3

Earth Fault Passage Indicator



Catalog

CONTENT

S.No.	Description	Page No.
1)	Introduction	03
2)	Features	03
3)	Functional Description	03
4)	Front Interface	
	a) CSFPI variants without Aux Supply	04
	b) CSFPI variants with Aux Supply	05
5)	Conn. Diagram	
	a) CSFPI variants without Aux Supply	06
	b) CSFPI variants with Aux Supply	07
6)	General Data	08
7)	Earth Fault Sensor Type	08
8)	Specification Table	
	a) CSFPI variants without Aux Supply	09
	b) CSFPI variants with Aux Supply	09
09)	Dimension Details	
	a) CSFPI variants without Aux Supply	10
	b) CSFPI variants with Aux Supply	11
10)	Ordering Information	
	a) CSFPI variants without Aux Supply	12
	b) CSFPI variants with Aux Supply	13

1) Introduction

CSFPI, Fault Passage Indicator is designed to detect and indicate Earth fault on a cable system, in RMU networks with one input / open ring arrangement. The product is powered by the Internal Battery. The unit will indicate a fault condition when current is detected above set trip current settings. Fault current is sensed by cable mounted sensor, which gives signal to indication unit. Sensor must be mounted on screened cable and can be retrofitted on the cable.

2) Features


- Programmable Earth fault pickup level (wide range) *
- Programmable response delay for Earth-fault *
- Indication of earth-fault by blinking of Earth-fault LED
- Up-to Two potential free contacts to indicate earth-fault. (remote indication for SCADA)
- Various Reset option for Fault Reset (Please refer specification table on page 9)

3) Functional Description

If the Earth current exceeds programmed set current for programmed response time the fault will be indicated by red flashing LED and relay contact will be activated. Reset occurs automatically by preset time passage or by a external potential free input or by recovering of Voltage * (Not an Aux. Supply) or by manually via push button. A Functional Test can also be carried out on field by pressing for more than 3 Sec and Battery Test by pressing the Push button for more than 6 Sec.


The sensor for earth fault detection is a summation type current sensor and it is dimensioned in such a way that it can be mounted around all three phases of the network.

Programmable parameters can be set through DIP switches which are accessible by opening the Front Cover of the CSFPI indication unit. Exit (Disable) option is available for fault detection.

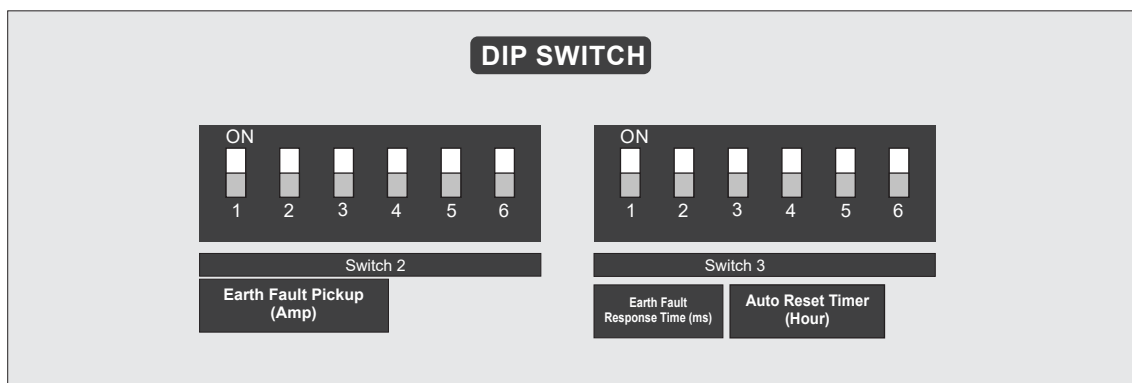


(Refer Table on Page - 9 for Setting Details)


4a) Front Interface - CSFPI variants with Aux Supply (C3 / C6)

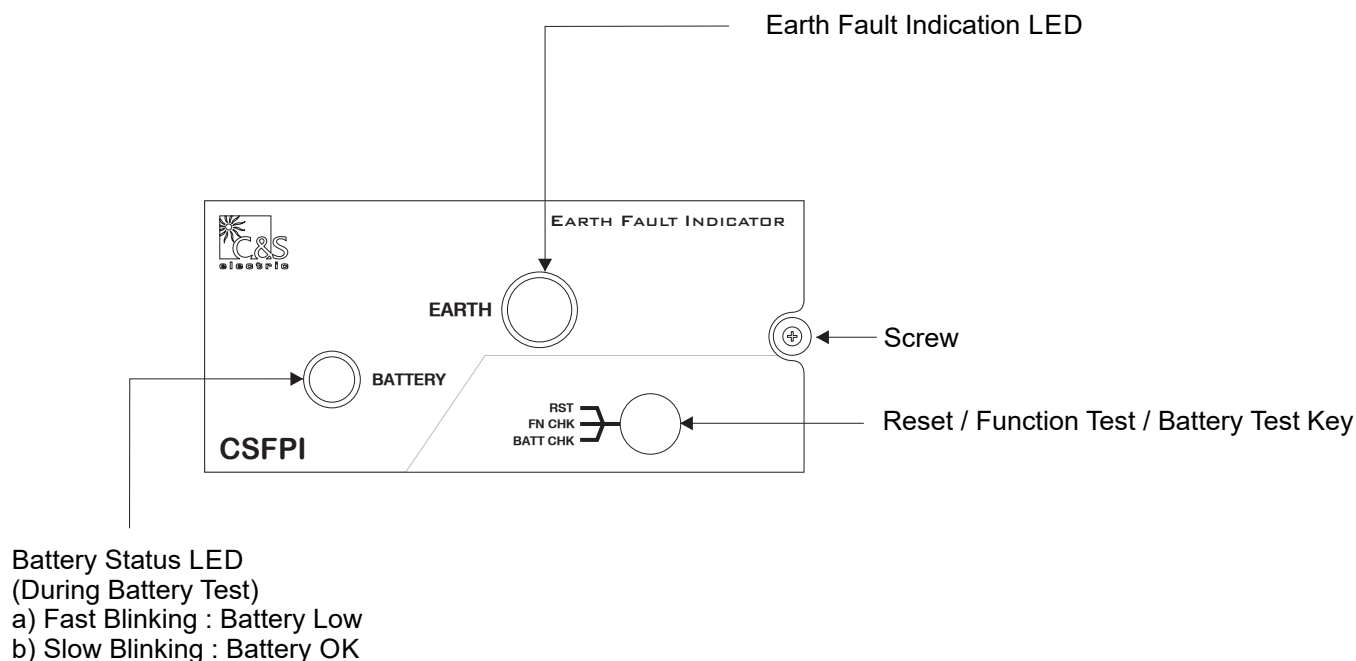

Note: open the Front plate by removing the front screw to access the DIP switch setting.

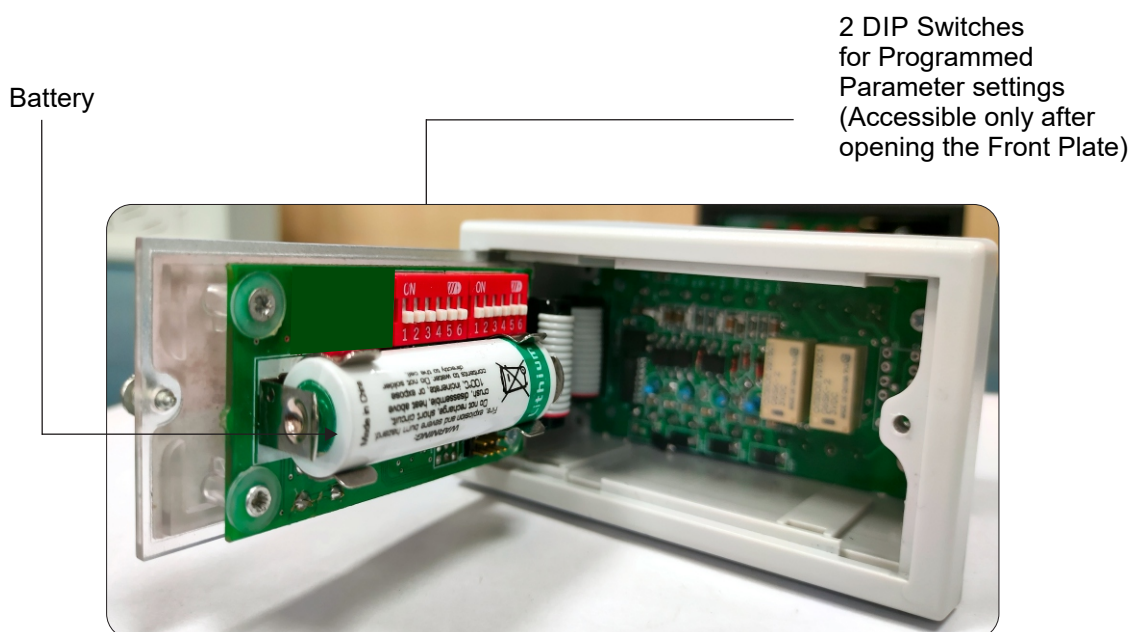

4b) Front Interface - CSFPI variants with Aux Supply (C14)

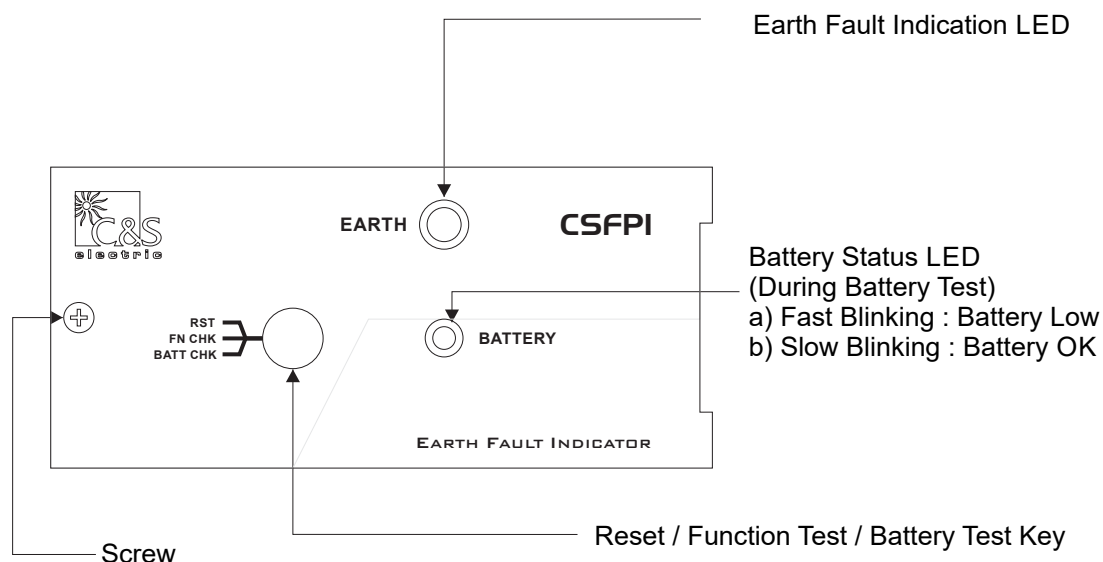


Note: open the Front plate by removing the front screw to access the DIP switch setting.

3 DIP Switches
for Programmed
Parameter settings
(Accessible only after
opening the Front Plate)


Battery




5a) Connection Diagram - CSFPI variants without Aux Supply (H Model)

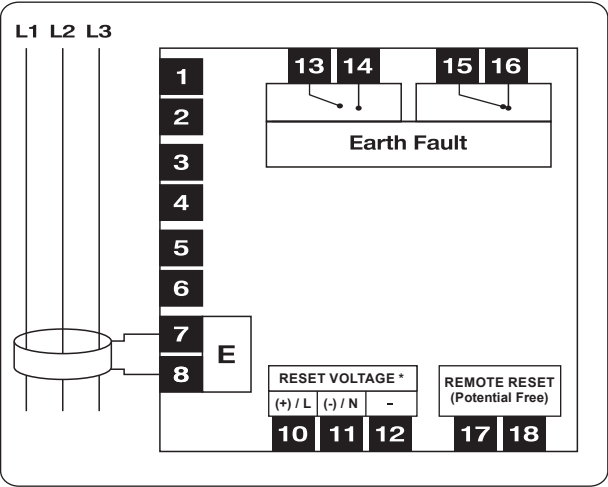

CSFPI-E-A-H-x

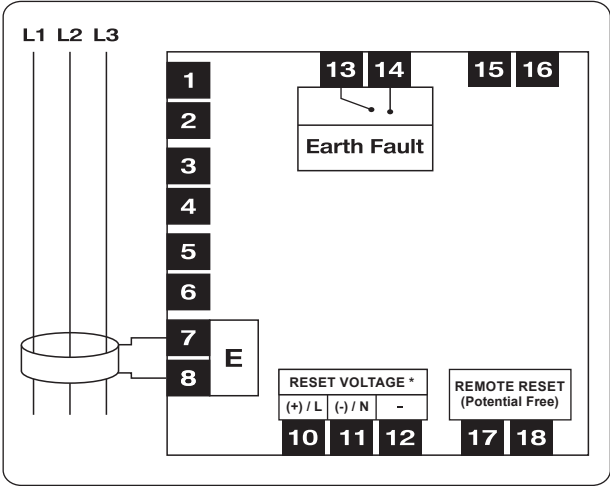

CSFPI-E-E-H-x

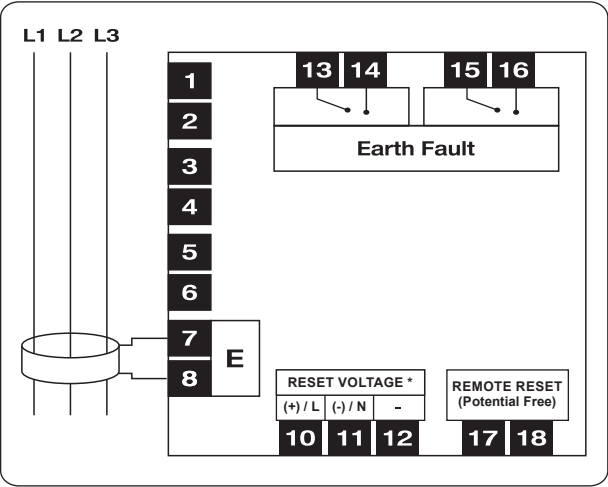


CSFPI-E-F-H-x

Note: Conn. diagram A, E, F are applicable for Standard, C3, C6 Models only * Model Dependent




CAUTION : Remote Reset Signal requires 200msec pulse. Continuous signal can reduce battery life.


5b) Connection Diagram - CSFPI variants with Aux Supply (L Model)

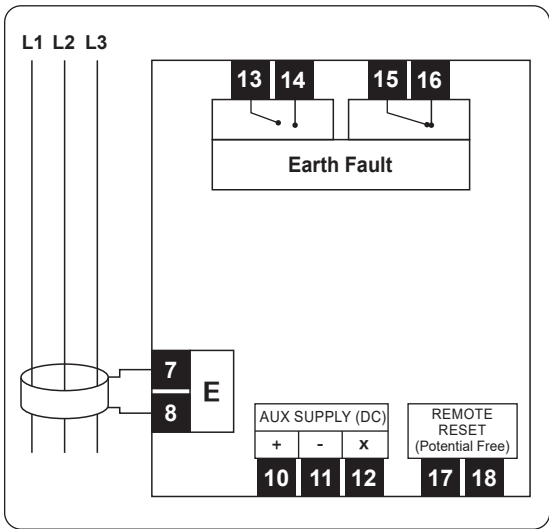

CSFPI-E-A-L-x

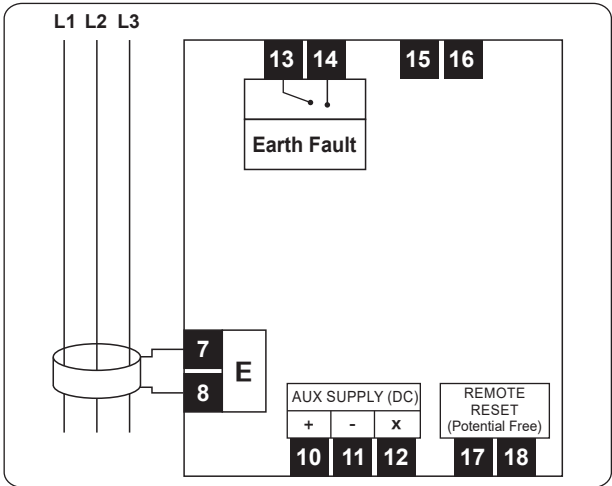

CSFPI-E-E-L-x

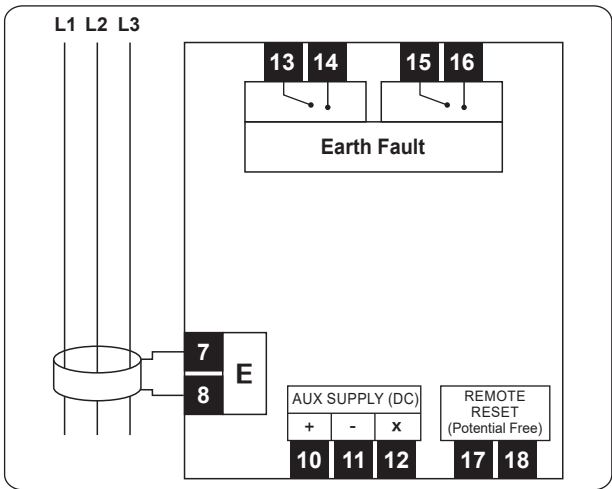

CSFPI-E-F-L-x



Note: Conn. diagram A, E, F are applicable for C14 Models only

CAUTION : Remote Reset Signal requires 200msec pulse. Continuous signal can reduce battery life.

* Model Dependent

6) General Data


Subject	Value
Earth-Fault Trip Current (Phase to Ground)	: Adjustable: : For Range : Refer Table on page 9 ($\pm 15\%$) **
Earth Fault Response Time	: Adjustable : For Range : Refer Table on page 9 ($\pm 100\text{msec}$) **
Indication Unit	: Suitable for panel installation
Indication of a) Earth-Fault b) Battery	: a) One Red LED for Earth-Fault : b) One Yellow LED for Battery Test
Reset of the Indicator	: a) Manual by push-button : b) Automatic Reset by Time : For Range : Refer Table on page 9 : c) Other Reset Function : Refer Table on page 9 : d) Remote Reset (Potential Free Input) - Remote Reset Signal requires 200msec pulse. Continuous signal can reduce battery life.
On Site Function Test	: By Push-Button
Dimensions	: Refer Page No. 10 & 11 for dimension details
Protection Class	: Indication Unit - IP50, Sensor - IP67
Type Test	: According to IEEE 495-2007
Operation Temperature Range	: -25°C to $+70^{\circ}\text{C}$
Power Supply	: Lithium Battery 3.6V / 2.7 Ah (Mandatory) & Aux supply : 18-40V DC
SCADA Contact *	: Max. 2 Latch Contacts : Nominal Switching Capacity : 2A 30V DC, 0.25A 240V AC (Resistive Load) : Max. Switching Power : 60W, 60VA (Resistive Load) : Max. Switching Voltage : 220V DC, 250V AC
Earth-Fault Sensor (CT)	: One Earth-Fault Sensor Type CS-x-ES-x-x for a Three-Core Cable : Diameter : various option available (Based on ordering information)
Connection & Mounting	: Screwed Terminal Connector at the rear side of the unit for connection. The unit is Panel mount.

** Accuracy claimed at 50Hz

* Model Dependent

7) Earth Fault Sensor Type (CS-x-ES-x-x)

Sensor dia (d)	Cable Dia
D1	80-100 mm (Round)
D3	120-140 mm (Round)
D4	180-200 mm (Round)

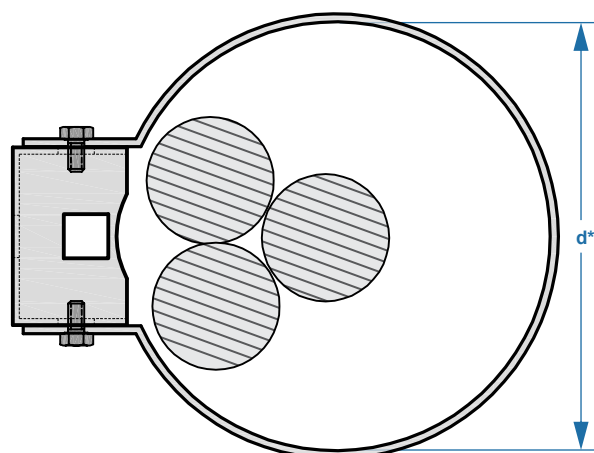

Sensor Diameter (d *) & Sensor Cable (2 Wire, 6mm dia, FR Grade type), Wire Length from Sensor to indicator (based on ordering information)

8a) Specification Table

CSFPI VARIANTS WITHOUT AUX SUPPLY			
Description	Standard	C3	C6
Earth-Fault Current Range	10-100A	100-300A	20-200A
Earth-Fault Trip Current Setting (A)	10/20/30/40/60/80/100	100/130/160/180/200/240/300	20/40/60/80/100/150/200
Earth Fault Response Time Setting (ms)	40/60/80/160	30/60/80/100	40/80/200/300
Indication of LEDs for			
Earth-Fault - 1 RED LED	✓	✓	✓
Battery - 1 YELLOW LED	✓	✓	✓
Reset Option			
Manual by push-button	✓	✓	✓
Remote Reset (Potential Free Input)	✓	✓	✓
Automatic Reset by time (Hr) $\pm$ 5%	1/2/4/8	0.5/1/2/3/4	2/4/8/16
Automatic Reset after recovery of voltage	230V AC/DC	230V AC/DC	230V AC/DC
On Site Function Test By push button	✓	✓	✓
Digital Output (SCADA contact)	Refer Ordering Information		
Power Source Li Battery 3.6V / 2.7 Ah (Mandatory)	✓	✓	✓
SENSOR INFORMATION			
Earth-Fault Sensor - 01 no.	✓	✓	✓
Wire Length from Sensor to Indicator (Meter)	Refer Ordering Information for Sensor Length		
Earth Sensor model	Refer Ordering Information for Sensor Selection		

8b) Specification Table


CSFPI VARIANTS WITH AUX SUPPLY	
Description	C14
Earth-Fault Current Range	50-400A
Earth-Fault Trip Current Setting (A)	50/100/150/200/300/350/400
Earth Fault Response Time Setting (ms)	30/60/80/160
Indication of LEDs for	
Earth-Fault - 1 RED LED	✓
Battery - 1 YELLOW LED	✓
Reset Option	
Manual by push-button	✓
Remote Reset (Potential Free Input)	✓
Automatic Reset by time (Hr) $\pm$ 5%	0.5/1/2/3/4 Hr.
On Site Function Test By push button	✓
Digital Output (SCADA contact)	Refer Ordering Information
Power Source Li Battery 3.6V / 2.7 Ah (Mandatory)	✓
Aux Supply	18-40V DC
SENSOR INFORMATION	
Earth-Fault Sensor - 01 no.	✓
Wire Length from Sensor to Indicator (Meter)	Refer Ordering Information for Sensor Length
Earth Sensor model	Refer Ordering Information for Sensor Selection

9a) Dimension Details - CSFPI variants without Aux Supply


Overall Dimension	: WxHxD = 96.8x50.3x61.3 mm
Panel cut out Dimension	
Width	: 92.0 ^{+0.8}
Height	: 45.0 ^{+0.8}
Installation Depth	: 52.0

Recommended panel sheet thickness "1mm to 1.6mm"


FRONT VIEW OF EARTH FAULT INDICATOR

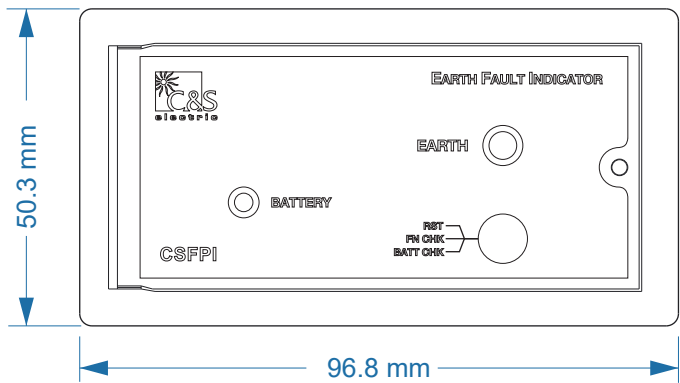


SIDE VIEW

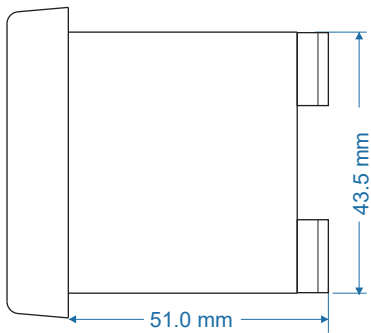

BACK VIEW

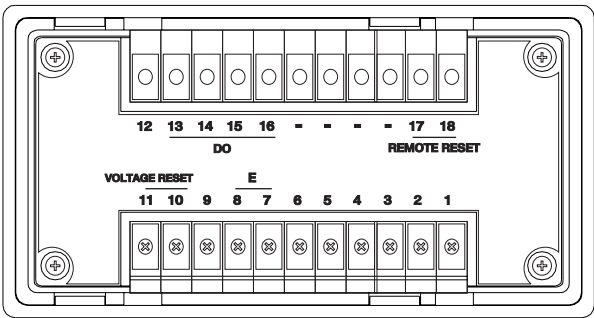

TOP VIEW

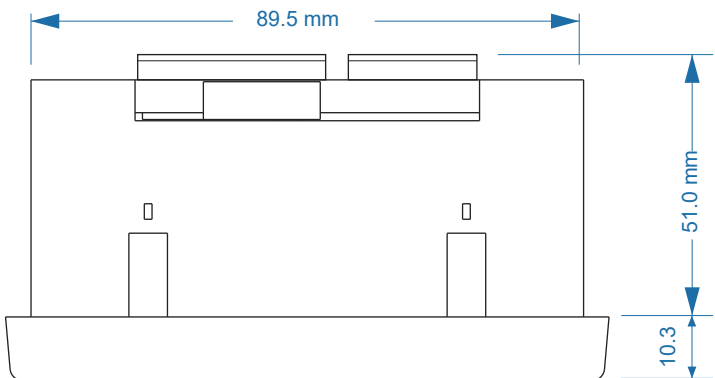


9b) Dimension Details - CSFPI variants with Aux Supply

Overall Dimension	: WxHxD = 97.8x51.8x92 mm
Panel cut out Dimension	
Width	: 91.0 mm
Height	: 46.0 mm
Installation Depth	: 84.0 mm


Recommended panel sheet thickness "1mm to 1.6mm"

FRONT VIEW OF EARTH FAULT INDICATOR


(Bezel Type - Standard, Refer ordering information)

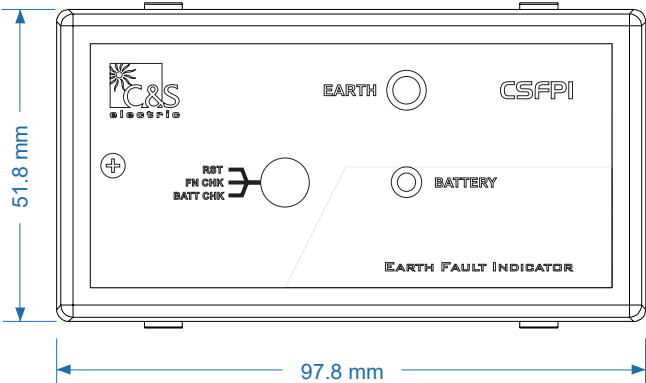


SIDE VIEW

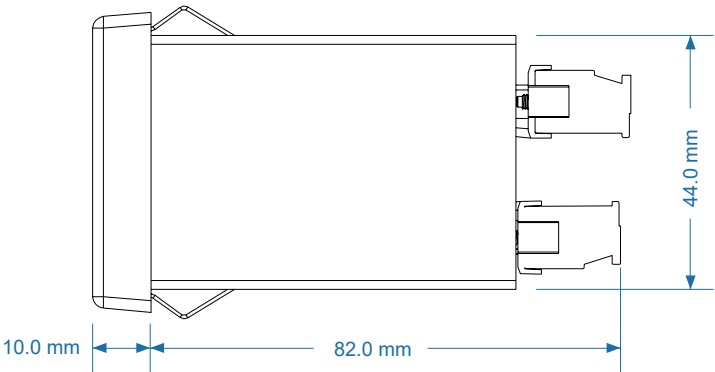

BACK VIEW

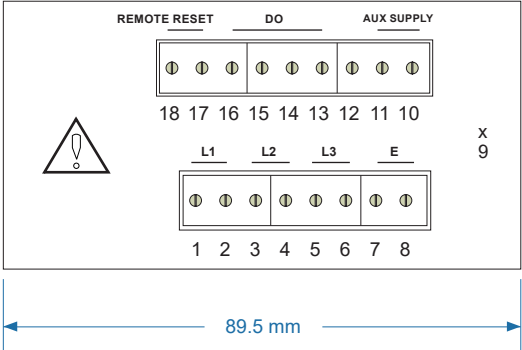

TOP VIEW

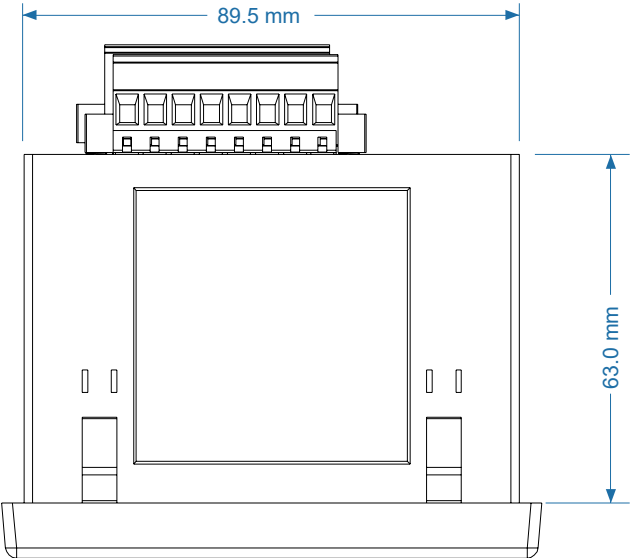

10a) Ordering Information - CSFPI variants without Aux Supply

CSFPI - E - X - H - X - X - X - V3

A	: Earth Fault Indicator with 1 NO & 1 NC Digital Output
E	: Earth Fault Indicator with 1 N/O Digital Output
F	: Earth Fault Indicator with 2 N/O Digital Output

Model variants
- : Standard
Cx : C3 / C6

Earth Sensor
E1 : Earth Sensor Dia D1 (80-100mm) with Teflon cable
E3 : Earth Sensor Dia D3 (120-140 mm) with Teflon cable
E1C : Earth Sensor Dia D1 (80-100mm) with PVC cable having shielded cable
E3C : Earth Sensor Dia D3 (120-140mm) with PVC cable having shielded cable
E4C : Earth Sensor Dia D4 (180-200 mm) with PVC cable having shielded cable
E1S : Earth Sensor Dia D1 (80-100mm) with Teflon having shielded cable
E3S : Earth Sensor Dia D3 (120-140 mm) with Teflon having shielded cable
Refer Sensor details

Sensor Cable Length
- : Cable Length 03 Meter
2 : Cable Length 02 Meter

Ordering Example :

- 1) With 2 Meter cable Length : CSFPI-E-A-H-C14-E1C-2-V3
- 2) With 3 Meter cable Length : CSFPI-E-A-H-C14-E1-V3

All the models have internally Battery for Power.

10b) Ordering Information - CSFPI variants with Aux Supply

CSFPI - E - X - L - X - X - X - V3

A	: Earth Fault Indicator with 1 NO & 1 NC Digital Output
E	: Earth Fault Indicator with 1 N/O Digital Output
F	: Earth Fault Indicator with 2 N/O Digital Output

Model variants
Cx : C14

Earth Sensor
E1 : Earth Sensor Dia D1 (80-100mm) with Teflon cable
E3 : Earth Sensor Dia D3 (120-140 mm) with Teflon cable
E1C : Earth Sensor Dia D1 (80-100mm) with PVC cable having shielded cable
E3C : Earth Sensor Dia D3 (120-140mm) with PVC cable having shielded cable
E4C : Earth Sensor Dia D4 (180-200 mm) with PVC cable having shielded cable
E1S : Earth Sensor Dia D1 (80-100mm) with Teflon having shielded cable
E3S : Earth Sensor Dia D3 (120-140 mm) with Teflon having shielded cable
Refer Sensor details

Sensor Cable Length
- : Cable Length 03 Meter
2 : Cable Length 02 Meter

- Ordering Example :
- 1) With 2 Meter cable Length : CSFPI-E-A-L-C14-E1C-2-V3
 - 2) With 3 Meter cable Length : CSFPI-E-A-L-C14-E1-V3

All the models have internally Battery for Power.

Revision History

[illegible]

NOTE

NOTE
The content in this document are not binding and is for general information.
C&S reserves the right to change the design, content or specification contained in this, without prior notice.

For further information, please contact:

C&S Electric Ltd.
(Protection & Measurement Devices)

C-60, Wing-A, Phase-II, Noida-201 305, Dist: Gautam Budh Nagar (U.P) INDIA
Phone : +91-120-38748 00 / 01 Fax: +91-120-3874802



Technical Question or After-sales Service

*Customer Center Quick Response
Service, Excellent Technical Support*

1800 572 2012

Branch Address

Branch	Phone	Fax	E-mail
Ahmedabad:	+91-79-615651 22/23/24	+91-79-61565130	ahmedabad@cselectric.co.in
Bangalore:	+91-80-305703 72/73, 30570347	+91 2558 4839	bangalore@cselectric.co.in
Bhubaneswar:	+91-674-2507265	+91 674 2507265	bhubaneswar@cselectric.co.in
Chennai:	+91-44-33534501,33534521-23	----	chennai@cselectric.co.in
Cochin:	+91-484-3071717	+91 0484 3071716	cochin@cselectric.co.in
Delhi:	+91-11-338490 00/10/11	+91 11 30838826	delhi@cselectric.co.in
Hyderabad:	+91-40-485340 80/82	----	hyderabad@cselectric.co.in
Kolkata:	+91-33-392121 19-21	----	----
Mumbai:	+91-22-241147 27/28	----	cspc.mumbai@cselectric.co.in
Pune:	+91-20-242505 18/19	+91 20 30283244	pune@cselectric.co.in

We touch your electricity everyday!